




READ AND UNDERSTAND ALL INSTRUCTION, WARNING, AND DANGER LABELS.
PARA INSTRUCCIONES EN ESPAÑOL, REFIÉRASE AL MANUAL DEL OPERADOR.




1

Check the mower deck for a shipping brace that may be holding the chute deflector upward for shipment. If the brace is present, it must be removed before operating the tractor. Holding the chute deflector fully upward, remove the shipping brace. Lower the chute deflector and discard the shipping brace.

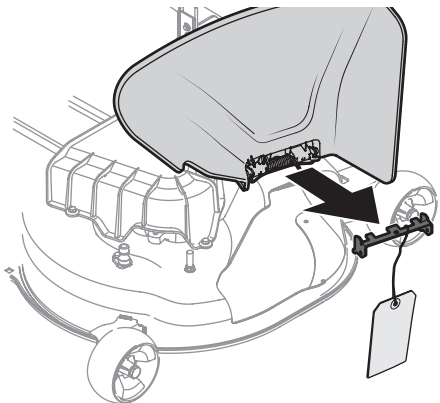


2

Attach the red cable to the positive (+) battery terminal and attach the black cable to the negative (-) battery terminal with the bolts and hex nuts. Position the red rubber boot over the positive battery terminal.




FAST START GUIDE

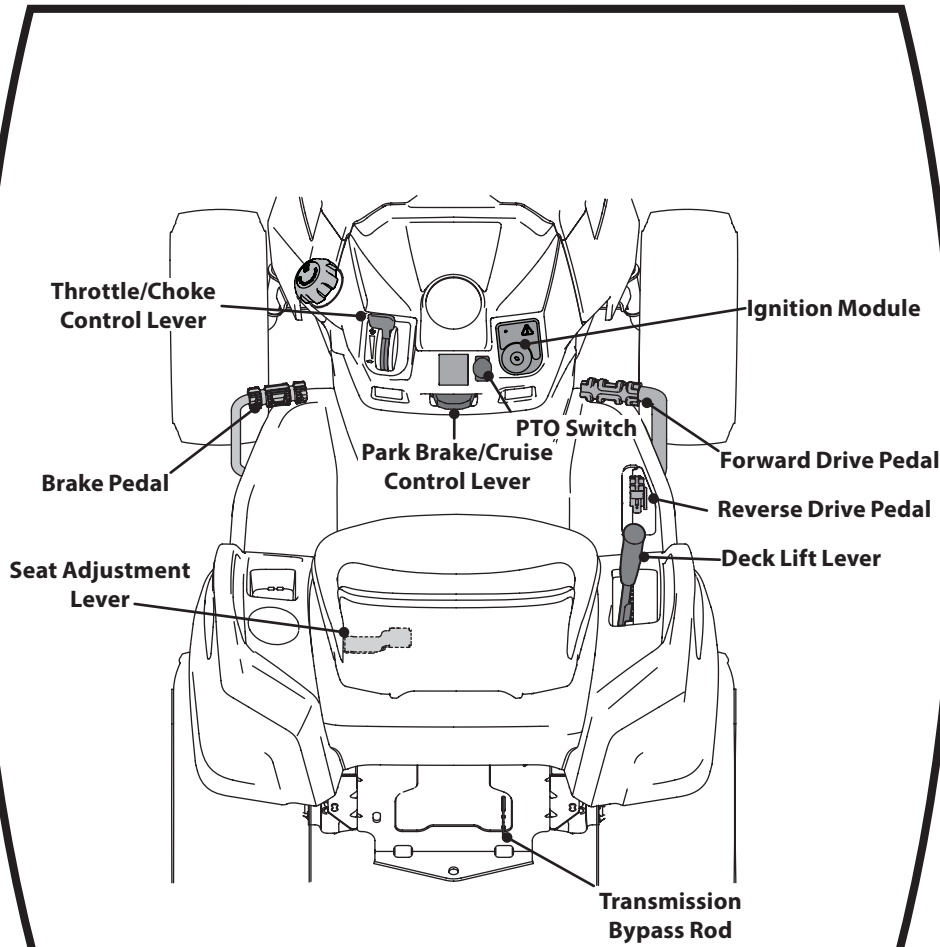

NOTE: Steering Wheel not shown for clarity.


3

Fill fuel tank with clean, fresh gasoline. Do not fill above the base of fuel tank neck.



4

Place PTO (Blade Engage) Knob in Off position.



IMPORTANT: READ OPERATOR'S MANUAL AND ENGINE MANUAL THOROUGHLY AND FOLLOW THE IMPORTANT SAFE OPERATION PRACTICES BEFORE OPERATING .



Need Help? Call 1-888-TO-HELP-U




READ AND UNDERSTAND ALL INSTRUCTION, WARNING, AND DANGER LABELS.
PARA INSTRUCCIONES EN ESPAÑOL, REFÍERASE AL MANUAL DEL OPERADOR.




1

Fully depress the Brake Pedal.

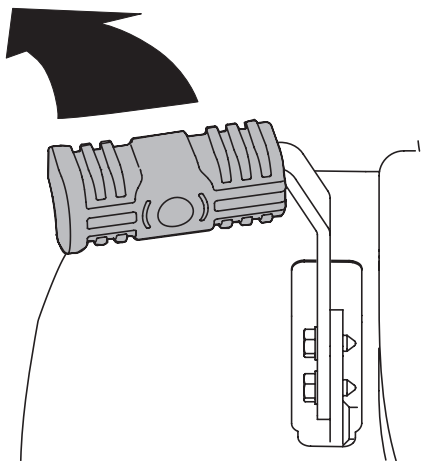


2

Move the throttle control into the Choke position.

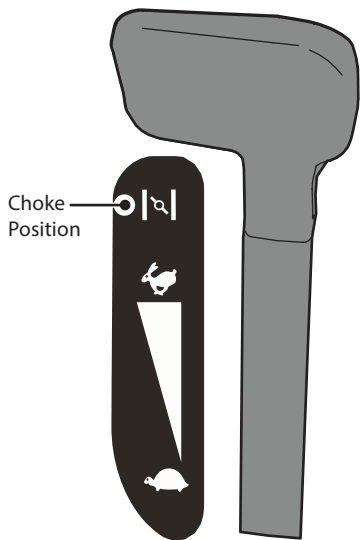


FAST START GUIDE

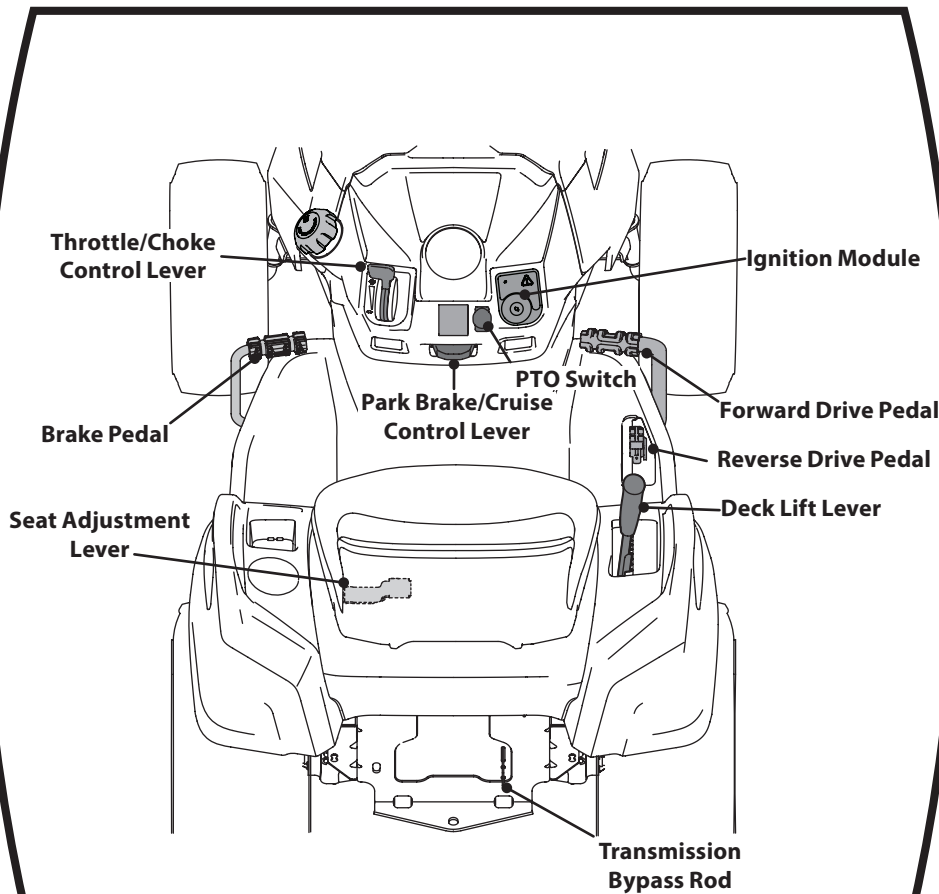

NOTE: Steering Wheel not shown for clarity.


3

Insert the ignition key and turn it to the Start position. Release the key into the Normal Mowing position after the engine starts.

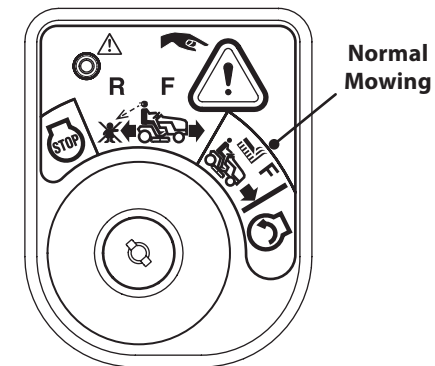

4

Move the throttle control into Fast position.

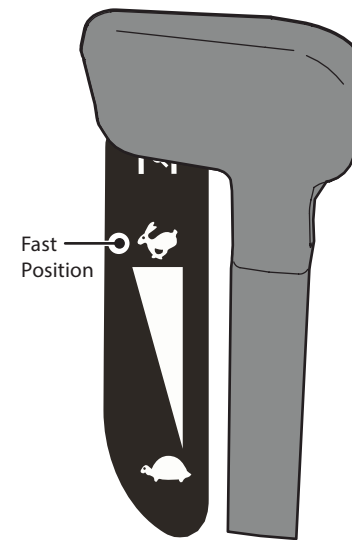

IMPORTANT: READ OPERATOR'S MANUAL AND ENGINE MANUAL THOROUGHLY AND FOLLOW THE IMPORTANT SAFE OPERATION PRACTICES BEFORE OPERATING.



Need Help? Call 1-888-TO-HELP-U