




Model Series
Covered in
This Manual
110000
120000

Operating & Maintenance Instructions for Intek™ and Quantum® with Touch-N-Mow™ Starter

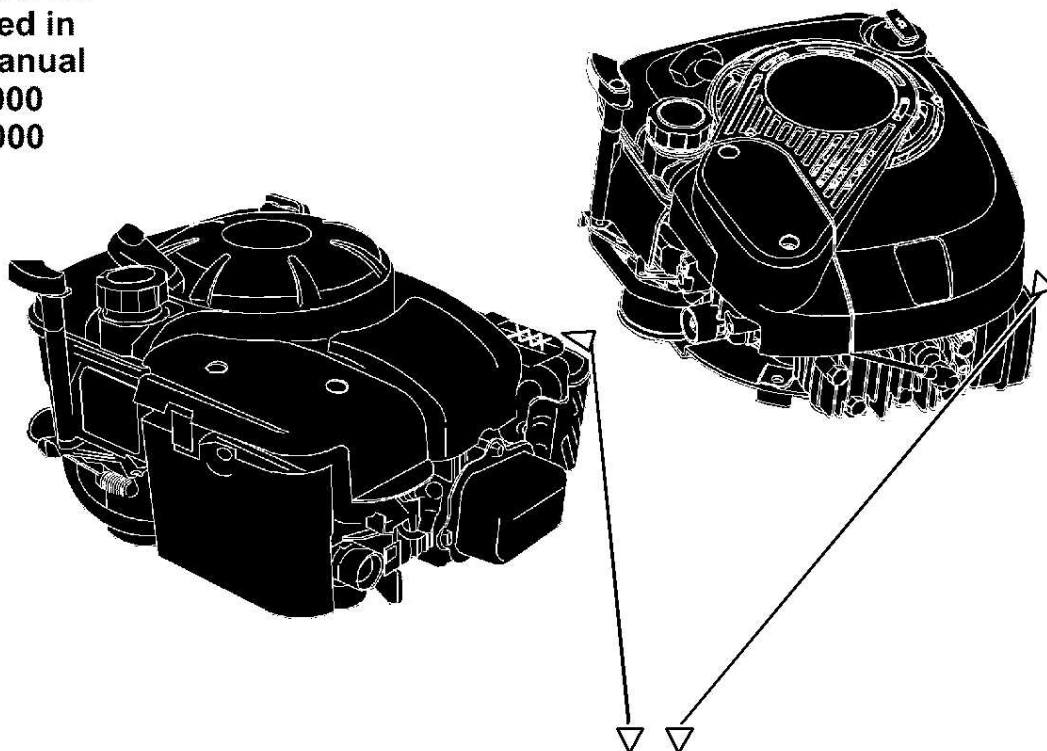

| Model | Type | Code |
|---|---|---|
| <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> |

| Month | Day | Year |
|---|---|---|
| <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> |

Note: General Model Series numbers noted above include many specific numbers like the ones on your engine. To get replacement parts or technical assistance in the future, write your engine Model, Type, Code and date of purchase here.

TABLE OF CONTENTS

| | |
|------------------------------|-------|
| Safety | 3-5 |
| Engine Information | 6 |
| Oil | 7 |
| Fuel and Starting Tips | 8 |
| Starting and Stopping | 9-10 |
| Maintenance | 11-13 |
| Adjustments | 14 |
| Storage and Service | 15-16 |
| Warranty Information | 17-20 |



WARNING

Briggs & Stratton does not approve or authorize the use of these engines on 3-wheel All Terrain Vehicles (ATVs), motor bikes, aircraft products or vehicles intended for use in competitive events. Use of these engines in such applications could result in property damage, serious injury (including paralysis), or even death.

Need assistance? Go to www.briggsandstratton.com for detailed information regarding Briggs & Stratton engines.

Or call, **1-800-233-3723**, (U.S.A. and Canada) to hear a menu of pre-recorded messages offering engine maintenance information.



The Power That Works For You.™

Look For Relevant Emissions Durability Period and Air Index Information On Your Engine Emissions Label

Engines that are certified to meet the California Air Resources Board (CARB) Tier 2 Emission Standards must display information regarding the Emissions Durability Period and the Air Index. Briggs & Stratton makes this information available to the consumer on our emission labels. The engine emission label will indicate certification information.

The **Emissions Durability Period** describes the number of hours of actual running time for which the engine is certified to be emissions compliant, assuming proper maintenance in accordance with the Operating & Maintenance Instructions. The following categories are used:

- Moderate:** Engine is certified to be emission compliant for 125 hours of actual engine running time.
- Intermediate:** Engine is certified to be emission compliant for 250 hours of actual engine running time.
- Extended:** Engine is certified to be emission compliant for 500 hours of actual engine running time.

For example, a typical walk-behind lawn mower is used 20 to 25 hours per year. Therefore, the **Emissions Durability Period** of an engine with an **intermediate** rating would equate to 10 to 12 years.

The **Air Index** is a calculated number describing the relative level of emissions for a specific engine family. The lower the **Air Index**, the cleaner the engine. This information is displayed in graphical form on the emissions label.



After July 1, 2000, Look For Emissions Compliance Period On Engine Emissions Compliance Label

After July 1, 2000 certain Briggs & Stratton engines will be certified to meet the United States Environmental Protection Agency (USEPA) Phase 2 emission standards. For Phase 2 certified engines, the Emissions Compliance Period referred to on the Emissions Compliance label indicates the number of operating hours for which the engine has been shown to meet Federal emission requirements. For engines less than 225 cc displacement, Category C = 125 hours, B = 250 hours and A = 500 hours. For engines of 225 cc or more, Category C = 250 hours, B = 500 hours and A = 1000 hours.

The displacement of INTEK™ Model Series 110000 engine is 167 cc, INTEK™ Model Series 120000 engine is 190 cc.

The displacement of QUANTUM® Model Series 120000 engine is 190 cc.

This is a generic representation of the emission label typically found on a certified engine.

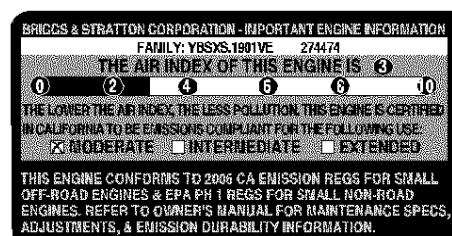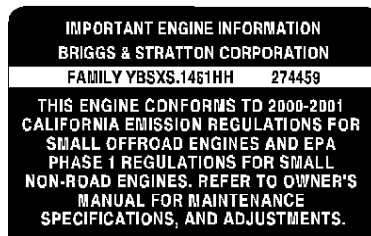



BEFORE OPERATING ENGINE

- Read entire Operating & Maintenance Instructions AND the instructions for the equipment this engine powers.*
- Failure to follow instructions could result in serious injury or death.

THE OPERATING & MAINTENANCE INSTRUCTIONS CONTAIN SAFETY INFORMATION TO

- Make you aware of hazards associated with engines
- Inform you of the risk of injury associated with those hazards, and
- Tell you how to avoid or reduce the risk of injury.

The safety alert symbol () is used to identify safety information about hazards that can result in personal injury.

A signal word (DANGER, WARNING, or CAUTION) is used with the alert symbol to indicate the likelihood and the potential severity of injury. In addition, a hazard symbol may be used to represent the type of hazard.



DANGER indicates a hazard which, if not avoided, **will result in death or serious injury.**



WARNING indicates a hazard which, if not avoided, **could result in death or serious injury.**



CAUTION indicates a hazard which, if not avoided, **might result in minor or moderate injury.**

CAUTION, when used **without** the alert symbol, indicates a situation that **could result in damage to the engine.**

HAZARD SYMBOLS AND MEANINGS



Fire



Moving Parts



Explosion



Shock



Hot Surface



Kickback



Toxic Fumes



WARNING



The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

THE INTERNATIONAL SYMBOLS USED ON THE ENGINE OR IN THIS MANUAL INCLUDE:



Safety Alert



Read Owner's Manual



On Off



Stop



Fuel Shutoff



Oil



Fuel



Primer



Choke

* Briggs & Stratton does not necessarily know what equipment this engine will power. For that reason, you should carefully read and understand the operating instructions for the equipment on which your engine is placed.

SAFETY

BRIGGS & STRATTON®



WARNING



Gasoline and its vapors are extremely flammable and explosive.

Fire or explosion can cause severe burns or death.

WHEN ADDING FUEL

- Turn engine OFF and let engine cool at least 2 minutes before removing gas cap.
- Fill fuel tank outdoors or in well-ventilated area.
- Do not overfill fuel tank. Fill tank to approximately 1-1/2 inches below top of neck to allow for fuel expansion.
- Keep gasoline away from sparks, open flames, pilot lights, heat, and other ignition sources.
- Check fuel lines, tank, cap, and fittings frequently for cracks or leaks. Replace if necessary.

WHEN STARTING ENGINE

- Make sure spark plug, muffler, fuel cap and air cleaner are in place.
- Do not crank engine with spark plug removed.
- If fuel spills, wait until it evaporates before starting engine.
- If engine floods, set choke to OPEN/RUN position, place throttle in FAST and crank until engine starts.

WHEN OPERATING EQUIPMENT

- Do not tip engine or equipment at angle which causes gasoline to spill.
- Do not choke carburetor to stop engine.

WHEN TRANSPORTING EQUIPMENT

- Transport with fuel tank EMPTY or with fuel shut-off valve OFF.

WHEN STORING GASOLINE OR EQUIPMENT WITH FUEL IN TANK

- Store away from furnaces, stoves, water heaters or other appliances that have pilot light or other ignition source because they can ignite gasoline vapors.



WARNING



Starting engine creates sparking.
Sparking can ignite nearby flammable gases.
Explosion and fire could result.

- If there is natural or LP gas leakage in area, do not start engine.
- Do not use pressurized starting fluids because vapors are flammable.



WARNING



Unintentional sparking can result in fire or electric shock.
Unintentional start-up can result in entanglement, traumatic amputation, or laceration.

BEFORE PERFORMING ADJUSTMENTS OR REPAIRS

- Disconnect spark plug wire and keep it away from spark plug.
- Disconnect battery at negative terminal (only engines with electric start).

WHEN TESTING FOR SPARK

- Use approved spark plug tester.
- Do not check for spark with spark plug removed.



WARNING



Engines give off carbon monoxide, an odorless, colorless, poison gas.

Breathing carbon monoxide can cause nausea, fainting or death.

- Start and run engine outdoors.
- Do not start or run engine in enclosed area, even if doors or windows are open.



WARNING



Rotating parts can contact or entangle hands, feet, hair, clothing, or accessories.

Traumatic amputation or severe laceration can result.

- Operate equipment with guards in place.
- Keep hands and feet away from rotating parts.
- Tie up long hair and remove jewelry.
- Do not wear loose-fitting clothing, dangling drawstrings or items that could become caught.



SAFETY

WARNING



Running engines produce heat. Engine parts, especially muffler, become extremely hot. Severe thermal burns can occur on contact. Combustible debris, such as leaves, grass, brush, etc. can catch fire.

- Allow muffler, engine cylinder and fins to cool before touching.
- Remove accumulated combustibles from muffler area and cylinder area.
- Install and maintain in working order a spark arrester before using equipment on forest-covered, grass-covered, brush-covered unimproved land. The state of California requires this (Section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal land.

WARNING



Rapid retraction of starter cord (kickback) will pull hand and arm toward engine faster than you can let go. Broken bones, fractures, bruises or sprains could result.

- When starting engine, pull cord slowly until resistance is felt, then pull rapidly.
- Remove all external equipment/engine loads before starting engine.
- Direct coupled equipment components such as, but not limited to, blades, impellers, pulleys, sprockets, etc., must be securely attached.

WARNING



Touch-N-Mow™ Starting System: If these instructions are not followed, traumatic amputation or severe laceration can result.

- ALWAYS disconnect spark plug, de-energize starter, lock and remove safety key BEFORE performing ANY service to the engine or mower. (See section **To De-Energize Touch-N-Mow™ Starter** on page 13.)
- DO NOT attempt any maintenance or repairs to the Touch-N-Mow™ starter.
- NEVER assume starter is de-energized, even if key is in LOCK AND REMOVE position and/or removed from engine.
- BEFORE removing grass or other debris from under mower deck; BEFORE changing oil, air filter or spark plug; BEFORE removing blade for servicing; BEFORE performing any other service to engine or mower; BEFORE transporting mower – ALWAYS DE-ENERGIZE TOUCH-N-MOW™ STARTER.
- ALWAYS lock and remove safety key and store in safe place until next use. The safety key is designed and intended to be removed from engine when not in use. Removing key will prevent unsupervised or unexpected starting of mower by children or unsuspecting adults. The safety key must be in locked position before it can be removed.


APPLIES TO TOUCH-N-MOW™ STARTING SYSTEM

|  WARNING | |
|---|--|
|  | LOCK & REMOVE Safety KEY when not in use. |
|  | DISCONNECT SPARK PLUG wire, DE-ENERGIZE , & LOCK starter BEFORE SERVICING engine or mower. |
|  | DO NOT remove or repair starter. Take machine to an authorized dealer. |

ENGINE INFORMATION

BRIGGS & STRATTON®


QUANTUM®

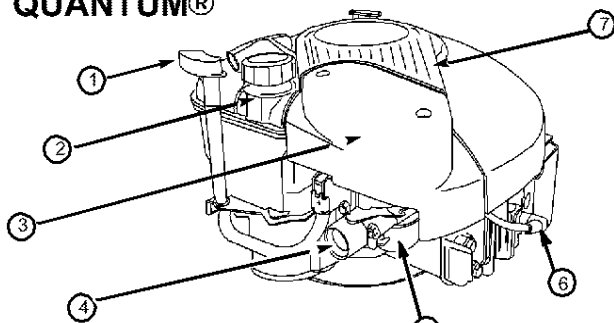

1. Touch-N-Mow™ safety key
2. Fuel fill
3. Air cleaner
4. Primer bulb
5. Carburetor

6. Spark plug wire
7. Finger guard

8. Engine Model Type Code
xxxxx xxxx xx xxxxxxxx

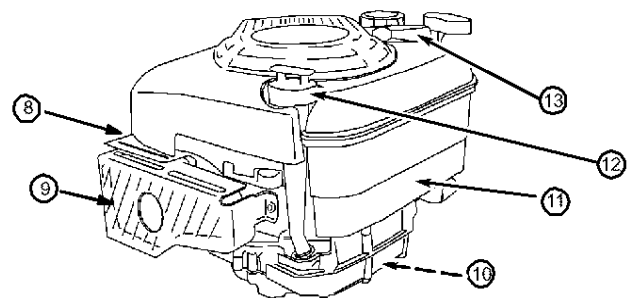

9. Muffler/(Muffler guard, if equipped)/
(Spark arrester, if equipped)
10. Side drain plug (if equipped)
11. Fuel tank
12. Oil fill/Dipstick
13. Rope handle

QUANTUM® GENERAL INFORMATION


ENGINE MODEL

This is a single cylinder, L-head, air-cooled engine. It is a low emissions engine.

QUANTUM® MODEL SERIES 120000

Bore 2-11/16 in. (68.26 mm)
Stroke 2-3/64 in. (51.99 mm)
Displacement 11.57 cu. in. (189.6 cc)


INTEK™

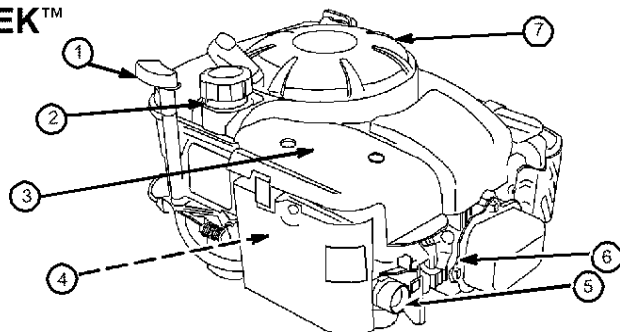

1. Touch-N-Mow™ safety key
2. Fuel fill
3. Air cleaner
4. Carburetor
5. Primer bulb

6. Spark plug wire
7. Finger guard

8. Engine Model Type Code
xxxxx xxxx xx xxxxxxxx

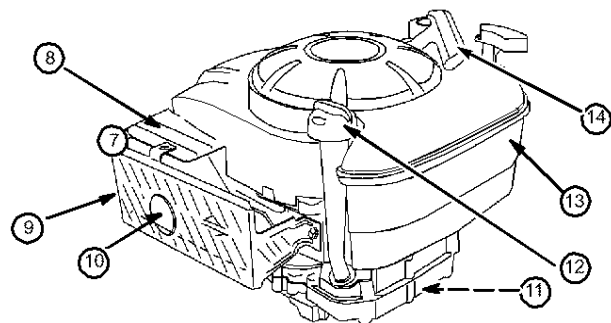

9. Muffler/Muffler guard (if equipped)
10. Spark arrester (if equipped)
11. Side drain plug (if equipped)
12. Oil fill/Dipstick
13. Fuel tank
14. Rope handle

INTEK™ GENERAL INFORMATION

ENGINE MODEL

This is a single cylinder, overhead valve (OHV). It is a low emissions engine.

In the state of California, OHV Model Series 110000 and 120000 engines are certified by the California Air Resources Board to meet emissions standards for 125 hours. Such certification does not grant the purchaser, owner or operator of this engine any additional warranties with respect to the performance or operational life of this engine. This engine is warranted solely according to the product and emissions warranties stated elsewhere in this manual.

INTEK™ MODEL SERIES 110000

Bore 2-11/16 in. (68.26 mm)
Stroke 1-51/64 in. (46.00 mm)
Displacement 10.20 cu. in. (167.4 cc)

INTEK™ MODEL SERIES 120000

Bore 2-11/16 in. (68.26 mm)
Stroke 2-3/64 in. (52.00 mm)
Displacement 11.57 cu. in. (189.6 cc)

Note: For practical operation, the horsepower loading should not exceed 85% of rated horsepower. Engine power will decrease 3-1/2% for each 1,000 feet (300 meters) above sea level and 1% for each 10° F (5.6° C) above 77° F (25° C). It will operate satisfactorily at an angle up to 15°.

**CAUTION:**

This engine is shipped from Briggs & Stratton **without oil**. Check oil level before starting engine. If you start the engine without oil, the engine will be damaged beyond repair and will not be covered under warranty.

OIL CAPACITY


Engine holds approximately 5/8 quart (20 ounces; 0.6 liter).

TYPE OF OIL TO USE

- Use a high quality detergent oil classified "For Service SF, SG, SH, SJ" or higher, such as Briggs & Stratton 30W, Part Number 100005 (20 oz) or 100028 (48 oz).
- Do not use special additives.
- Choose a viscosity according to the table opposite.



Note: Synthetic oil meeting ILSAC GF-2, API certification mark and API service symbol (shown at left) with "SJ/CF ENERGY CONSERVING" or higher, is an acceptable oil at all temperatures. **Use of synthetic oil does not alter required oil change intervals.**

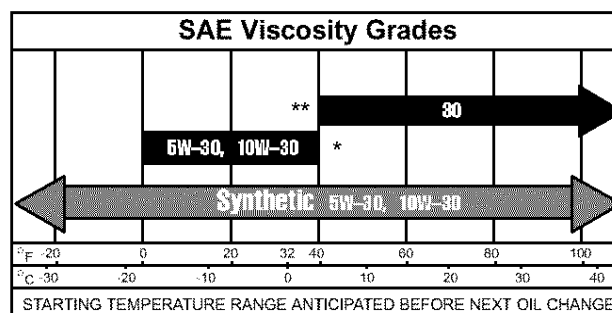


* **CAUTION:** Air cooled engines run hotter than automotive engines. The use of non-synthetic multi-viscosity oils (5W-30, 10W-30, etc.) in temperatures above 40° F (4° C) will result in higher than normal oil consumption. When using a multi-viscosity oil, check oil level more frequently.


** **CAUTION:** SAE 30 oil, if used below 40° F (4° C), will result in hard starting and possible engine bore damage due to inadequate lubrication.

ADDING OIL

- [1] Place engine level and clean around oil fill area.

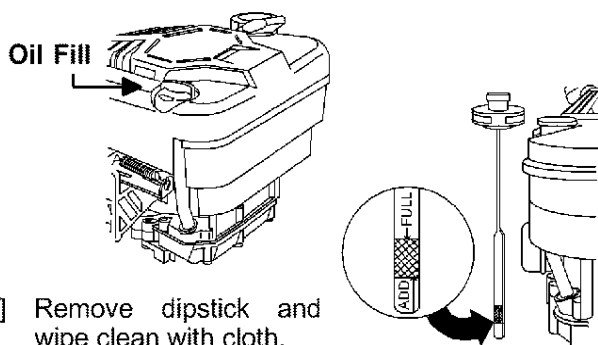

- [2] Remove dipstick and wipe clean with cloth.
- [3] Replace and tighten dipstick. Remove and check oil level.
- [4] Oil level should be at FULL line on dipstick.
- [5] If needed, add oil slowly - recheck.
Do not over fill.
- [6] Replace and tighten dipstick.

**CAUTION:**

Do not overfill. Overfilling with oil may cause:

Smoking,
Hard starting,
Spark plug fouling, or
Oil saturation of air filter.


- Check oil level *before* starting the engine.
- Check level daily, or after every eight (8) hours.
- Keep oil level at FULL.

See also **Maintenance** section for instructions on changing oil and scheduled maintenance intervals.

CAUTION:

If engine is tipped to transport equipment, remove grass, drain oil, etc., **keep spark plug side of engine up**. Tipping engine with spark plug down may cause:

- Smoking,
- Hard starting,
- Spark plug fouling,
- Oil saturation of air filter.

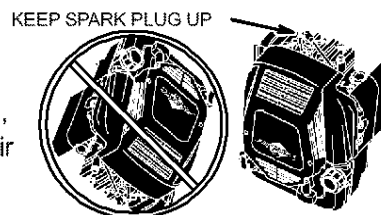

FUEL



BRIGGS & STRATTON

QUANTUM®

TYPE OF FUEL TO USE

Use clean, fresh, regular unleaded gasoline with a **minimum of 77 octane.**

INTEK™

TYPE OF FUEL TO USE

Use clean, fresh, regular unleaded gasoline with a **minimum of 85 octane.**

CAUTION: Some fuels, called oxygenated or reformulated gasoline, are gasoline blended with alcohols or ethers. Excessive amounts of these blends can damage the fuel system or cause performance problems. If any undesirable operating symptoms occur, use gasoline with a lower percentage of alcohol or ether.

- Fresh fuel prevents gum from forming in the fuel system or on essential carburetor parts. Purchase fuel in quantity that can be used within 30 days.
- Do not use gasoline which contains Methanol.
- Do not mix oil with gasoline.
- For engine protection use Briggs & Stratton Gasoline Additive available from your Authorized Briggs & Stratton Dealer (P/N 5041 or single use pouch).
- This engine is certified to operate on gasoline. Exhaust Emission Control System: EM (Engine Modifications).



WARNING



- Do not use pressurized starting fluids.
- Vapors are flammable.

ADDING FUEL

CAUTION: Engine is often shipped with a blue plug in the fuel fill, remove and discard. It is not a component of the fuel tank.



WARNING




Fill fuel tank outdoors or in well-ventilated area, away from sparks, open flames, pilot lights, heat, and other ignition sources.

If fuel spills, wait until it evaporates before starting engine.

Turn engine OFF and let engine cool at least 2 minutes before removing gas cap.

Fuel Fill

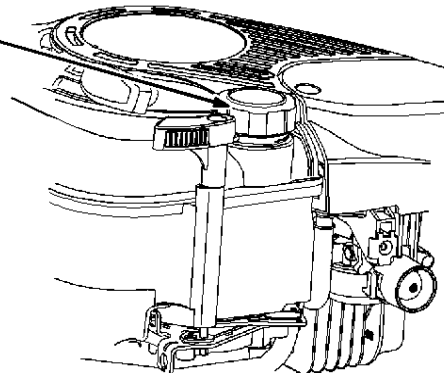

- [1] Remove cap. Fill tank to approximately 1-1/2 inches below top of neck to allow for fuel expansion. Be careful not to overfill. Briggs & Stratton **Smart-fill®** fuel can fills to the correct level and automatically shuts off, reducing spills and emissions.
- [2] Replace cap before starting.



STARTING AND STOPPING

Touch-N-Mow™ Starting System: If these instructions are not followed, traumatic amputation or severe laceration can result.

! WARNING



- ALWAYS disconnect spark plug, de-energize starter, lock and remove safety key BEFORE performing ANY service to the engine or mower. (See section **To De-Energize Touch-N-Mow™ Starter** on page 13.)
- DO NOT attempt any maintenance or repairs to the Touch-N-Mow™ starter.
- NEVER assume starter is de-energized, even if key is in LOCK AND REMOVE position and/or removed from engine.
- BEFORE removing grass or other debris from under mower deck; BEFORE changing oil, air filter or spark plug; BEFORE removing blade for servicing; BEFORE performing any other service to engine or mower; BEFORE transporting mower – ALWAYS DE-ENERGIZE TOUCH-N-MOW™ STARTER.
- ALWAYS lock and remove safety key and store in safe place until next use. The safety key is designed and intended to be removed from engine when not in use. Removing key will prevent unsupervised or unexpected starting of mower by children or unsuspecting adults. The safety key must be in locked position before it can be removed.

To Start Engine First Time

OR when the Touch-N-Mow™ starter is De-Energized

(See section **To De-Energize Touch-N-Mow™ Starter**, Page 13)

The Touch-N-Mow™ starting system is shipped in a de-energized state. To energize this starting system, you must first start the engine using the rewind (manual) starter. The Touch-N-Mow™ starter will not be energized until a complete startup and shutdown procedure have been completed.

BEFORE STARTING

- ◆ Place lawn mower on level surface outdoors.
- ◆ Add fuel.
- ◆ Add and check oil. Ensure oil level is FULL.
- ◆ Push spark plug wire firmly on to spark plug.
- ◆ Open fuel shut off valve. (IF EQUIPPED)

- [1] Install safety key in locked position. Be sure to read and retain helpful starting tips enclosed with packaging of the safety key.
- [2] Turn safety key to RUN position (1/4 turn toward fuel cap).
- [3] Press engine primer bulb 3 times.



WARNING: A typical equipment control configuration is shown. (See equipment manufacturer's owner/operating manual for specific instructions on equipment control configuration and operation.)



- [4] Actuate equipment starting controls according to instructions in manufacturer's owner/operating manual.



WARNING: [5] Grasp rope handle. Pull slowly until resistance is felt, then pull rapidly to start engine and avoid kickback.

Note: If engine does not start on second pull, press engine primer bulb 3 times again and repeat steps 4 and 5.

The Touch-N-Mow™ starting system is not energized yet. To energize the Touch-N-Mow™ starting system, see section **To Stop Engine / Energize Touch-N-Mow™ System**, page 13.

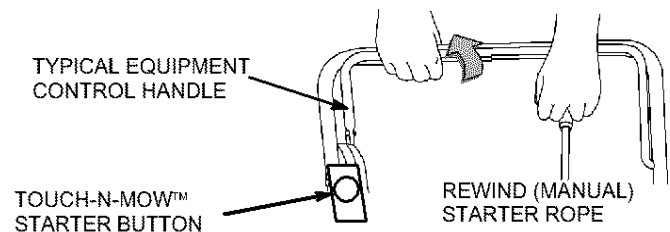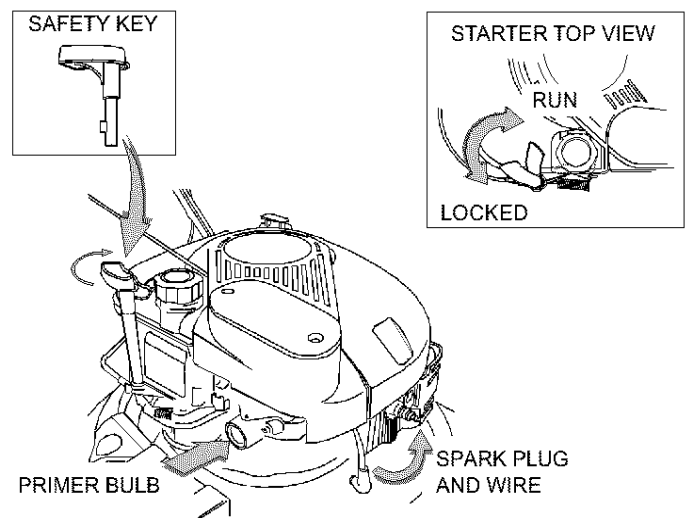

STARTING AND STOPPING

BRIGGS & STRATTON

To Stop Engine / Energize Touch-N-Mow™ Starting System

Touch-N-Mow™ starting system is functioning properly when a mechanical winding/ratcheting sound is heard upon releasing equipment control handle. This is the sound of the Touch-N-Mow™ starting system energizing for the next start. Engine must be running to energize Touch-N-Mow™ Starting System.




WARNING: A typical equipment control configuration is shown. (See equipment manufacturer's owner/operating manual for specific instructions on equipment control configuration and operation.)

- [1] Release equipment control handle per equipment manufacturer's instructions.
- [2] ALWAYS lock safety key as shown and remove when not in use. Turn safety key to LOCK AND REMOVE position (1/4 turn opposite fuel cap) and remove.
- [3] Close fuel shut-off valve (if equipped).

TYPICAL EQUIPMENT CONTROL HANDLE



STARTER TOP VIEW



OPERATING TIPS

- ♦ Use fresh fuel. Use correct type of oil for expected starting temperature.
- ♦ Remove external equipment/engine loads before starting. (See equipment operating instructions.)
- ♦ Start lawn mower on hard surface or over previously cut grass.
- ♦ Periodically remove grass buildup under mower deck.
- ♦ After engine has started, let it warm up several seconds to several minutes, depending on outside temperature.
- ♦ For maximum performance and life, operate engine with choke (if equipped) in RUN and throttle in FAST.

To Start Warm Engine

- [1] A warm engine DOES NOT require priming.
- [2] Install and turn safety key to RUN position (1/4 turn toward fuel cap).
- [3] Actuate equipment starting controls according to instructions in manufacturer's owner/operating manual.

Note: If for some reason engine does not start on first attempt using Touch-N-Mow™ starter, you must use rewind starter to re-start engine. Press engine primer bulb 3 times and start according to manufacturer's owner/operating manual.

To Start Cold or Stored Engine

- [1] Check oil level (See **Oil** section).
- [2] Press engine primer bulb 3 times.
- [3] Install and turn safety key to RUN position (1/4 turn toward fuel cap).
- [4] Actuate equipment starting controls according to instructions in manufacturer's owner/operating manual.

Note: If for some reason engine does not start on first attempt using Touch-N-Mow™ starter, you must use rewind starter to re-start engine. Press engine primer bulb 3 times and start according to manufacturer's owner/operating manual.

To De-energize Touch-N-Mow™ Starter

Before servicing, storing, or transporting engine, ensure the starter is not energized by manually de-energizing it.

Warning: Keep hands and feet away from rotating parts. The engine will turn over when de-energizing.

- [1] Remove spark plug wire from spark plug.
- [2] Turn safety key to RUN position (1/4 turn toward fuel cap).
- [3] Actuate equipment starting controls according to instructions in manufacturer's owner/operating manual.



Engine will crank over upon actuating equipment starting controls, but will not start if spark plug wire was removed from spark plug as described above. Once engine has stopped cranking, Touch-N-Mow™ starter is de-energized.

- [4] Turn safety key to LOCK AND REMOVE position (1/4 turn opposite fuel cap) and remove key. Mower or engine may now be safely serviced or stored.

SAFETY KEY




STARTER TOP VIEW

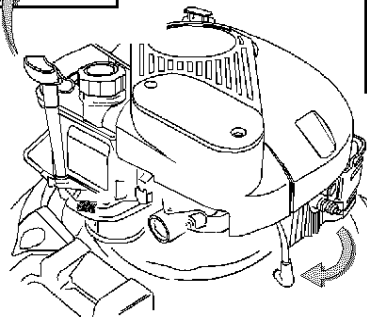

REMOVE SPARK PLUG WIRE

TYPICAL EQUIPMENT CONTROL HANDLE





MAINTENANCE

MAINTENANCE

Regular maintenance will improve the performance and extend the life of the engine. See any Authorized Briggs & Stratton Dealer for service. **Use only genuine Briggs & Stratton parts. Other parts may not perform as well, may damage the engine, and may result in injury.** In addition, use of other parts may void your warranty.

Follow the instructions and schedules indicated below.

| Task | Every 8 Hours or Daily | 25 Hours or Every Season | 50 Hours or Every Season | 100 Hours or Every Season | 100-300 Hours |
|--|------------------------|--------------------------|--------------------------|---------------------------|---------------|
| <i>Perform task at hourly or calendar interval, whichever comes first.</i> | | | | | |
| Check Oil Level | ✓ | | | | |
| Change Oil | | | ✓* | | |
| Change oil filter (if equipped) | | | | ✓* | |
| Service air cleaner filter | | ✓** | | | |
| Service air cleaner cartridge (if equipped with pre-cleaner) | | | | ✓** | |
| Inspect spark arrester (if equipped) | | | ✓ | | |
| Replace spark plug | | | | ✓ | |
| Replace in-line fuel filter (if equipped) | | | | ✓ | |
| Clean air cooling system | | | | ✓** | |
| Check valve clearance | | | | | ✓ |
| Clean combustion chamber | | | | | ✓ |

* **Change oil after first 5 to 8 hours of use**, then every 50 hours or every season. Change oil every 25 hours when operating the engine under heavy load or in high temperatures.

** Clean more often under dusty conditions or when airborne debris is present. Replace air cleaner parts, if very dirty.

CAUTION: Used oil is a hazardous waste product. Dispose of used oil properly. Do not discard with household waste. Check with your local authorities, service center, or dealer for safe disposal/recycling facilities.

EMISSION CONTROL

Maintenance, replacement or repair of the emission control devices and systems may be performed by any nonroad engine repair establishment or individual. However, to obtain no charge repairs under the terms and provisions of the Briggs & Stratton warranty statement, any service or emission control part repair or replacement must be performed by a factory authorized dealer.




WARNING



ALWAYS disconnect spark plug, de-energize starter, lock and remove safety key **BEFORE** performing ANY service to the engine or mower. Traumatic amputation or severe laceration can result.



CHANGING OIL

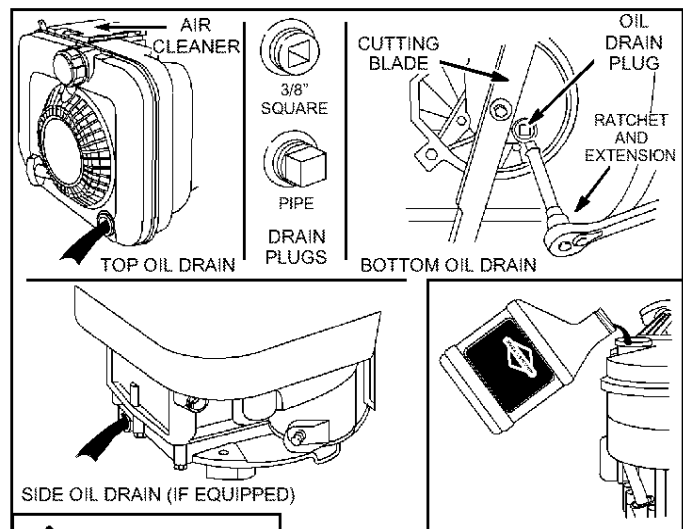

WARNING



[1] Run engine until it runs out of fuel. Otherwise, fuel can leak out, creating a fire/explosion hazard, when you tip engine in Step 4.

[2] Disconnect spark plug wire and keep it away from spark plug. De-energize starter, and lock and remove safety key. (See Page 13)

[3] With engine OFF but still warm remove dipstick.

[4] Top oil drain, keep air cleaner above oil outlet. Bottom or side oil drain (if equipped), keep engine level. Drain oil into appropriate receptacle.

Note: Top oil drain is recommended method, however oil can drain from side (if equipped) or bottom as shown.

[5] Place engine level. Add about 5/8 quart (20 ounces: 0.6 liter) new oil. Fill to FULL line on dipstick. **Do not overfill.** Replace dipstick.



WARNING




ALWAYS disconnect spark plug, de-energize starter, lock and remove safety key BEFORE performing ANY service to the engine or mower. Traumatic amputation or severe laceration can result.



CHANGING OIL FILTER (if equipped)

- [1] After draining engine of used oil, fill with fresh oil.
- [2] Before installing new filter, lightly oil filter gasket with fresh, clean oil.
- [3] Screw filter on by hand until gasket contacts oil filter adapter.
- [4] Tighten 1/2 to 3/4 turn more.
- [5] Start and run engine at idle to check for leaks.
- [6] Stop engine. Re-check oil level. Add oil if required.


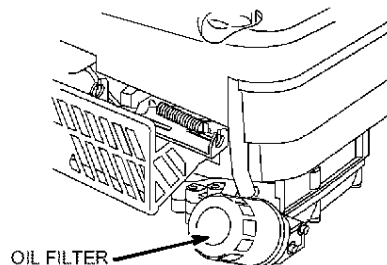


OIL FILTER

AIR CLEANER

All engines have an air cleaner cartridge. The cartridge is either flat or oval (see illustrations). In addition, some engines have a pre-cleaner.

CAUTION: Do not use pressurized air or solvents to clean cartridge. Pressurized air can damage cartridge; solvents will dissolve cartridge.

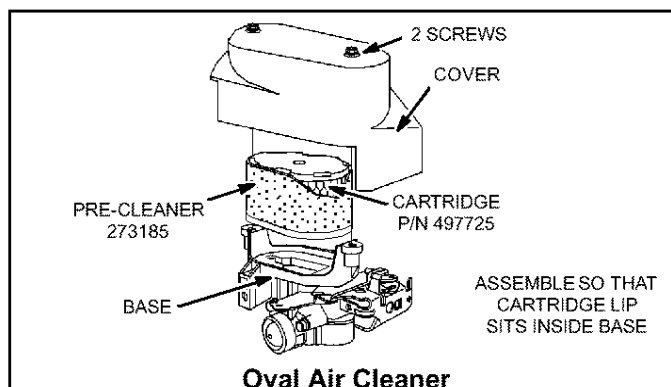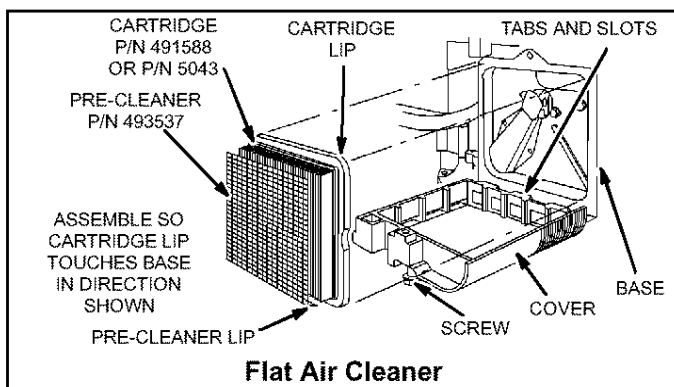

REMOVING AND RE-INSTALLING FLAT AIR CLEANER

- [1] Loosen screw and tilt cover down.
- [2] Remove air cleaner.
- [3] Re-install clean (or new) air cleaner assembly inside cover. Lip of pre-cleaner (if equipped) must be at bottom of cartridge pleats.
- [4] Insert cover's tabs into slots in bottom of base.
- [5] Tilt cover up into place and tighten screw.

REMOVING AND RE-INSTALLING OVAL AIR CLEANER

- [1] Loosen two screws and lift off cover.
- [2] Remove air cleaner assembly (pre-cleaner, if equipped, and cartridge) from base.
- [3] Re-install clean (or new) air cleaner assembly in base. Air cleaner must fit securely in base.
- [4] Place cover over air cleaner and tighten screws.



ENGINE AND ENGINE PARTS

We recommend that you see an authorized Briggs & Stratton Service Dealer for all maintenance and service of the engine and engine parts. Use only genuine Briggs & Stratton parts.

WARNING



ALWAYS disconnect spark plug, de-energize starter, lock and remove safety key BEFORE performing ANY service to the engine or mower. Traumatic amputation or severe laceration can result.

- Do not strike the flywheel with a hammer or hard object because the flywheel may later shatter during operation.
- Do not tamper with governor spring, links or other parts to increase engine speed.


FUEL SYSTEM

WARNING



Replacement parts for fuel system (cap, hoses, tanks, filters, etc.) must be the same as original parts, otherwise fire can occur.

REPLACE FUEL FILTER (IF EQUIPPED)

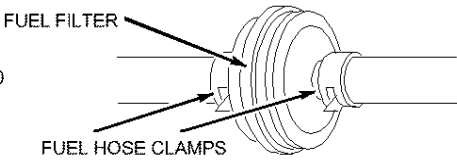



FUEL FILTER

PART NO. 298090
OR 5018

FUEL HOSE CLAMPS

WARNING



[1] Disconnect spark plug wire and keep away from spark plug. De-energize starter. Lock and remove safety key. (See Page 13)

[2] Drain fuel tank or close fuel shut-off valve before replacing fuel filter. Otherwise, fuel can leak out, creating a fire/explosion hazard.

MUFFLER

WARNING




Replacement parts for the muffler must be the same and installed in the same position as the original parts, otherwise fire can occur.

If muffler is equipped with spark arrester screen, remove screen for inspection. Replace screen if damaged or plugged.

SPARK PLUG

Use only Briggs & Stratton Spark Tester (part number 19368) to check for spark.

Note: In some areas, local law requires using resistor spark plug to suppress ignition signals. If this engine was originally equipped with resistor spark plug, use same type for replacement.

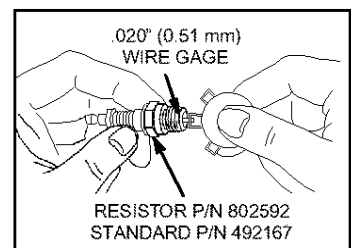

COMBUSTION DEPOSITS

We recommend that after every 100-300 hours you have an authorized Briggs & Stratton Service Dealer remove combustion deposits from the cylinder, cylinder head, top of piston, and around valves.

AIR COOLING SYSTEM

We recommend that after every 100 hours you have an authorized Briggs & Stratton Service Dealer clean the air cooling system.

Over time debris may accumulate in cylinder cooling fins and cannot be observed without partial engine disassembly. For this reason, we recommend that you have an authorized Briggs & Stratton Service Dealer clean the air cooling system per recommended intervals. Equally important is to keep top of engine free from debris.

VALVE CLEARANCE

Check valve clearance yearly. (See Tune-up Specifications on page 16.)


MAINTENANCE

BRIGGS & STRATTON



CLEANING DEBRIS

CAUTION: Do not use water to clean engine parts. Water could contaminate fuel system. Use a brush or dry cloth.

Daily or before every use, clean grass, chaff or accumulated debris from engine. Keep debris guard clean. Keep linkage, spring and controls clean. Keep area around and behind muffler free of any combustible debris.



Engine parts should be kept clean to reduce the risk of overheating and ignition of accumulated debris. This is especially important if cutting tall grass.



ADJUSTMENTS

BRIGGS & STRATTON



Prevent unintentional starting. Before performing adjustments:

- Remove spark plug wire from spark plug.
- Disconnect battery at negative terminal (only engines with electric start).
- ALWAYS de-energize starter, lock and remove safety key. (See section *To De-Energize Touch-N-Mow™ Starter* on page 13.)

CARBURETOR ADJUSTMENT



The manufacturer of the equipment on which this engine is installed specifies top speed at which the engine will be operated. DO NOT EXCEED this speed.


The carburetor on this engine is not adjustable.

Note: Engines operated at about 3000 to 5000 feet (900 to 1500 meters) above sea level may require a high altitude carburetor main jet. If erratic performance is observed, contact a Briggs & Stratton Authorized Service Dealer for cost to install/purchase a high altitude carburetor main jet, if available.

TO ADJUST STOP SWITCH

Governor control lever should make good contact with stop switch. Check operation of throttle.

Readjust if necessary.

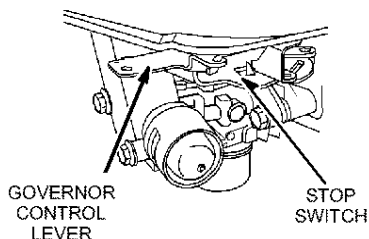


THROTTLE ADJUSTMENT

The governor lever on this engine is bent into position and is not adjustable. See your authorized Briggs & Stratton dealer or follow the instructions below.

TO ADJUST REMOTE THROTTLE **

** On some models the governor lever is bent into position and is not adjustable.

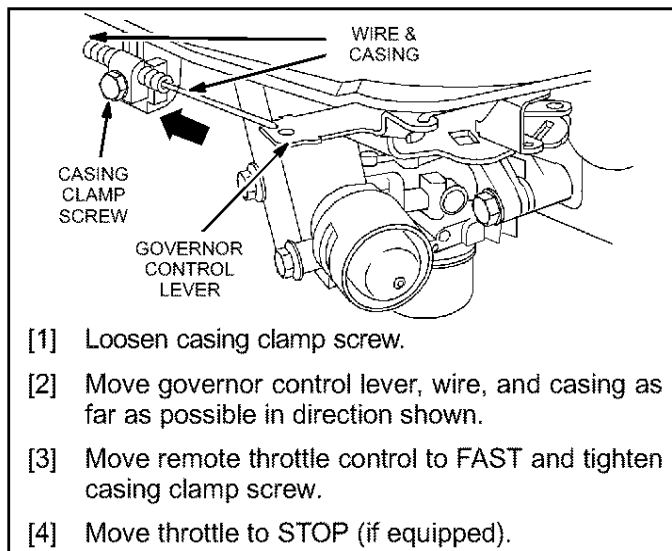



SERVICE

PARTIAL LIST OF GENUINE BRIGGS & STRATTON PARTS

QUANTUM®

| PART | BRIGGS & STRATTON PART NO. |
|--|----------------------------|
| Safety key | 695951 |
| Flat air cleaner cartridge | 491588 -or- (5043) |
| Flat air cleaner pre-cleaner | 493537 |
| Oval air cleaner cartridge | 497725 |
| Oval air pre-cleaner | 273185 |
| Oil | 100005 -or- 00028 |
| Fuel Filter | 298090 -or- (5018) |
| Gas additive | 5041 |
| Resistor spark plug | 802592 |
| Standard spark plug | 492167 |
| Long life platinum spark plug (used on most L-head engines) | 5062 |
| Spark plug wrench | 89838 |
| Spark tester | 19368 |
| Oil pump kit | 5056 |
| (uses standard electric drill to remove oil from engine quickly) | |

An illustrated shop manual includes common specifications and detailed information covering adjustment, tune-up and repair of Briggs & Stratton single cylinder, L-head, 4 cycle engines. It is available for purchase from an Authorized Briggs & Stratton Service Dealer or you can order it from the factory. Write: Briggs & Stratton Corporation
Attn: Service Division
P. O. Box 1144
Milwaukee, WI 53201



Part No. 270962

INTEK™

An illustrated shop manual includes common specifications and detailed information covering adjustment, tune-up and repair of Briggs & Stratton single cylinder, OHV, 4 cycle engines. It is available for purchase from an Authorized Briggs & Stratton Service Dealer or you can order it from the factory. Write: Briggs & Stratton Corporation
Attn: Service Division
P. O. Box 1144
Milwaukee, WI 53201



Part No. 274008

INTEK™

| PART | BRIGGS & STRATTON PART NO. |
|--|----------------------------|
| Safety key | 695951 |
| Flat air cleaner cartridge | 491588 -or- (5043) |
| Flat air cleaner pre-cleaner | 493537 |
| Oval air cleaner cartridge | 690610 |
| Oval air pre-cleaner | 273356 |
| Oil | 100005 -or- 100028 |
| Fuel filter | 298090 -or- (5018) |
| Gas additive | 5041 |
| Resistor spark plug | 499608 |
| Spark plug wrench | 89838 |
| Spark tester | 19368 |
| Oil pump kit | 5056 |
| (uses standard electric drill to remove oil from engine quickly) | |

To purchase a complete list of Genuine Briggs & Stratton Parts for your engine, fill in both sides of this order form carefully. We cannot fill your order without the correct Engine Model/Type/Code. Allow 3 to 4 weeks for delivery.

| | |
|---|---|
| Fill in both sides of this order form carefully | |
| Payment Method: <input type="checkbox"/> Check or money order enclosed payable to Briggs & Stratton Corporation in the amount of \$ _____ (U.S. Dollars, please) <input type="checkbox"/> Please charge my <input type="checkbox"/> MasterCard <input type="checkbox"/> VISA | EXPIRATION DATE _____ CREDIT CARD NUMBER _____ |
| SIGNATURE (REQUIRED FOR CREDIT CARD ORDERS) _____ | |
| Parts List \$2.00 Shipping & Handling \$1.50 ** Add State Sales Tax _____ Total _____ | Add sales tax if you live in any of the following states: **AL 5%, CT 6%, FL 6.5%, GA 4%, KY 6%, MI 6%, MN 6%, MO 4.225%, NY 8.5%, OH 5%, TN 6%, TX 6.25%, WA 6.5%, WI 5% |

SERVICE & STORAGE

BRIGGS & STRATTON

SERVICE

See an Authorized Briggs & Stratton Service Dealer. Each one carries a stock of Genuine Briggs & Stratton Parts and is equipped with special service tools. Trained mechanics assure expert repair service on all Briggs & Stratton engines. Only dealers advertising as "Authorized Briggs & Stratton" are required to meet Briggs & Stratton standards.

When you purchase equipment powered by a Briggs & Stratton engine, you are assured of highly skilled, reliable service at more than 30,000 Authorized Service Dealers worldwide, including more than 5,000 Master Service Technicians. Look for these signs wherever Briggs & Stratton service is offered.



You may locate your nearest Authorized Briggs & Stratton Service Dealer in our dealer locator map on our web site www.briggsandstratton.com or in the "Yellow Pages™"



directory under "Engines, Gasoline" or "Gasoline Engines," or "Lawn Mowers" or similar category.

Note: Walking fingers logo and "Yellow Pages" are registered trademarks in various jurisdictions.

TUNE-UP SPECIFICATIONS

Armature air gap . . . 0.006 – 0.010 in. (0.15 – 0.25 mm)

Spark plug gap 0.020 in. (0.51 mm)

Valve clearance with valve springs installed and piston 1/4 in. (6 mm) past top dead center (check when engine is cold). See Repair Manual P/N 270962.

Intake 0.005 – 0.007 in. (0.13 – 0.18 mm)

Exhaust 0.005 – 0.007 in. (0.13 – 0.18 mm)

STORAGE

Engines stored over 30 days need special attention.

- [1] To prevent gum from forming in fuel system or on essential carburetor parts:
 - a) if fuel tank contains oxygenated or reformulated gasoline (gasoline blended with an alcohol or an ether), run engine until it stops from lack of fuel, **or** b) if fuel tank contains gasoline, either run engine until it stops from lack of fuel, or add a gasoline additive to the gas in the tank. (See parts list. Single – use pouches of gas additive are available from your service dealer.) If you use a gas additive, run the engine for several minutes to circulate the additive through the carburetor. Then, engine and fuel can be stored up to 24 months.
- [2] While engine is still warm, change oil.
- [3] Remove spark plug and pour about 1/2 oz. (15 ml) of engine oil into cylinder. Replace spark plug and crank slowly to distribute oil.
- [4] Clean engine of surface debris, chaff or grass.
- [5]



WARNING



Store in a clean, dry area with the Touch-N-Mow™ starter de-energized and the safety key removed. Do not store in same area as a stove, furnace, water heater, or other appliance that uses a pilot light or has a device that can create a spark.

Fill in both sides, clip and return to:
Briggs & Stratton Corporation
P.O. Box 1144
Milwaukee, WI 53201-1144 U.S.A.

| | | | |
|----------------------|----------------------|----------------------|----------------------|
| Name _____ | State _____ | Zip _____ | Country _____ |
| Address _____ | | | |
| City _____ | | | |
| Your Engine Model | Type | Code | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

To purchase a complete list of Genuine Briggs & Stratton Parts for your engine, fill in both sides of this order form carefully. We cannot fill your order without the correct Engine Model/Type/Code. Allow 3 to 4 weeks for delivery.

**Briggs & Stratton Corporation (B&S), the California Air Resources Board (CARB)
and the United States Environmental Protection Agency (U.S. EPA)
Emission Control System Warranty Statement (Owner's Defect Warranty Rights and Obligations)**

EMISSION CONTROL WARRANTY COVERAGE IS APPLICABLE TO CERTIFIED ENGINES PURCHASED IN CALIFORNIA IN 1995 AND THEREAFTER, WHICH ARE USED IN CALIFORNIA, AND

California and United States Emission Control Defects Warranty Statement

The California Air Resources Board (CARB), U.S. EPA and B&S are pleased to explain the Emission Control System Warranty on your model year 2000 and later small off-road engine (SORE). In California, new small off-road engines must be designed, built and equipped to meet the State's stringent anti-smog standards. Elsewhere in the United States, new non-road, spark-ignition engines certified for model year 1997 and later must meet similar standards set forth by the U.S. EPA. B&S must warrant the emission control system on your engine for

Briggs & Stratton Emission Control Defects Warranty Coverage

Small off-road engines are warranted relative to emission control parts defects for a period of two years, subject to provisions set forth

Owner's Warranty Responsibilities

As the small off-road engine owner, you are responsible for the performance of the required maintenance listed in your Operating and Maintenance Instructions. B&S recommends that you retain all your receipts covering maintenance on your small off-road engine, but B&S cannot deny warranty solely for the lack of receipts or for your failure to ensure the performance of all scheduled maintenance.

As the small off-road engine owner, you should however be aware that B&S may deny you warranty coverage if your small off-road engine or a part has failed due to abuse, neglect, improper maintenance or unapproved modifications.

Briggs & Stratton Emission Control Defects Warranty Provisions

The following are specific provisions relative to your Emission Control Defects Warranty Coverage. It is in addition to the B&S engine warranty for non-regulated engines found in the Operating and Maintenance Instructions.

1. Warranted Parts

Coverage under this warranty extends only to the parts listed below (the emission control systems parts) to the extent these parts were present on the engine purchased.

a. Fuel Metering System

- Cold start enrichment system
- Carburetor and internal parts
- Fuel Pump

b. Air Induction System

- Air cleaner
- Intake manifold

c. Ignition System

- Spark plug(s)
- Magneto ignition system

d. Catalyst System

- Catalytic converter
- Exhaust manifold
- Air injection system or pulse valve

e. Miscellaneous Items Used in Above Systems

- Vacuum, temperature, position, time sensitive valves and switches
- Connectors and assemblies

2. Length of Coverage

B&S warrants to the initial owner and each subsequent purchaser that the Warranted Parts shall be free from defects in materials and workmanship which caused the failure of the Warranted Parts for a period of two years from the date the engine is delivered to a retail purchaser.

TO CERTIFIED MODEL YEAR 1997 AND LATER ENGINES WHICH ARE PURCHASED AND USED ELSEWHERE IN THE UNITED STATES (AND AFTER JANUARY 1, 2001 IN CANADA).

the periods of time listed below, provided there has been no abuse, neglect or improper maintenance of your small off-road engine.

Your emission control system includes parts such as the carburetor, air cleaner, ignition system, muffler and catalytic converter. Also included may be connectors and other emission related assemblies. Where a warrantable condition exists, B&S will repair your small off-road engine at no cost to you including diagnosis, parts and labor.

Briggs & Stratton Emission Control Defects Warranty Coverage

below. If any covered part on your engine is defective, the part will be repaired or replaced by B&S.

You are responsible for presenting your small off-road engine to an Authorized B&S Service Dealer as soon as a problem exists. The undisputed warranty repairs should be completed in a reasonable amount of time, not to exceed 30 days.

If you have any questions regarding your warranty rights and responsibilities, you should contact a B&S Service Representative at 1-414-259-5262.

The emission warranty is a defects warranty. Defects are judged on normal engine performance. The warranty is not related to an in-use emission test.

3. No Charge

Repair or replacement of any Warranted Part will be performed at no charge to the owner, including diagnostic labor which leads to the determination that a Warranted Part is defective, if the diagnostic work is performed at an Authorized B&S Service Dealer. For emissions warranty service contact your nearest Authorized B&S Service Dealer as listed in the "Yellow Pages" under "Engines, Gasoline," "Gasoline Engines," "Lawn Mowers," or similar category.

4. Claims and Coverage Exclusions

Warranty claims shall be filed in accordance with the provisions of the B&S Engine Warranty Policy. Warranty coverage shall be excluded for failures of Warranted Parts which are not original B&S parts or because of abuse, neglect or improper maintenance as set forth in the B&S Engine Warranty Policy. B&S is not liable to cover failures of Warranted Parts caused by the use of add-on, non-original, or modified parts.

5. Maintenance

Any Warranted Part which is not scheduled for replacement as required maintenance or which is scheduled only for regular inspection to the effect of "repair or replace as necessary" shall be warranted as to defects for the warranty period. Any Warranted Part which is scheduled for replacement as required maintenance shall be warranted as to defects only for the period of time up to the first scheduled replacement for that part. Any replacement part that is equivalent in performance and durability may be used in the performance of any maintenance or repairs. The owner is responsible for the performance of all required maintenance, as defined in the B&S Operating and Maintenance Instructions.

6. Consequential Coverage

Coverage hereunder shall extend to the failure of any engine components caused by the failure of any Warranted Part still under warranty.

In the USA and Canada, a 24 hour hot line, **1-800-233-3723**, has a menu of pre-recorded messages offering you engine maintenance information.

About your engine warranty: (see next page for statement of LIMITED WARRANTY).

Briggs & Stratton welcomes warranty repair and apologizes to you for being inconvenienced. Any Authorized Service Dealer may perform warranty repairs. Most warranty repairs are handled routinely, but sometimes requests for warranty service may not be appropriate. For example, warranty would not apply if engine damage occurred because of misuse, lack of routine maintenance, shipping, handling, warehousing or improper installation. Similarly, warranty is void if the serial number of the engine has been removed or the engine has been altered or modified.

If a customer differs with the decision of the Service Dealer, an investigation will be made to determine whether the warranty applies. Ask the Service Dealer to submit all supporting facts to its Distributor or the Factory for review. If the Distributor or the Factory decides that the claim is justified, the customer will be fully reimbursed for those items that are defective. To avoid misunderstanding which might occur between the customer and the Dealer, listed below are some of the causes of engine failure that the warranty does not cover.

Normal wear:

Engines, like all mechanical devices, need periodic parts service and replacement to perform well. Warranty will not cover repair when normal use has exhausted the life of a part or an engine.

Improper maintenance:

The life of an engine depends upon the conditions under which it operates, and the care it receives. Some applications, such as tillers, pumps and rotary mowers, are very often used in dusty or dirty conditions, which can cause what appears to be premature wear. Such wear, when caused by dirt, dust, spark plug cleaning grit, or other abrasive material that has entered the engine because of improper maintenance, is not covered by warranty.

This warranty covers engine related defective material and/or workmanship only, and not replacement or refund of the equipment to which the engine may be mounted. Nor does the warranty extend to repairs required because of:

1. PROBLEMS CAUSED BY PARTS THAT ARE NOT ORIGINAL BRIGGS & STRATTON PARTS.
2. Equipment controls or installations that prevent starting, cause unsatisfactory engine performance, or shorten engine life. (Contact equipment manufacturer.)
3. Leaking carburetors, clogged fuel pipes, sticking valves, or other damage, caused by using contaminated or stale fuel. (Use clean, fresh, lead-free gasoline and Briggs & Stratton gasoline stabilizer, Part No. 5041.)

4. Parts which are scored or broken because an engine was operated with insufficient or contaminated lubricating oil, or an incorrect grade of lubricating oil. Refill when necessary; OIL GARD® may not shut down running engine. Engine damage may occur if oil level is not properly maintained. Read the recommended maintenance intervals for your engine outlined in the Operating & Maintenance Instructions.
5. Repair or adjustment of associated parts or assemblies such as clutches, transmissions, remote controls, etc., which are not manufactured by Briggs & Stratton.
6. Damage or wear to parts caused by dirt, which entered the engine because of improper air cleaner maintenance, re-assembly, or use of a non-original air cleaner element or cartridge. Read the recommended maintenance intervals for your engine outlined in the Operating & Maintenance Instructions.
7. Parts damaged by overspeeding, or overheating caused by grass, debris, or dirt, which plugs or clogs the cooling fins, or flywheel area, or damage caused by operating the engine in a confined area without sufficient ventilation. Read the recommended maintenance intervals for your engine outlined in the Operating & Maintenance Instructions.
8. Engine or equipment parts broken by excessive vibration caused by a loose engine mounting, loose cutter blades, unbalanced blades or loose or unbalanced impellers, improper attachment of equipment to engine crankshaft, overspeeding or other abuse in operation.
9. A bent or broken crankshaft, caused by striking a solid object with the cutter blade of a rotary lawn mower, or excessive v-belt tightness.
10. Routine tune-up or adjustment of the engine.
11. Engine or engine component failure, i.e., combustion chamber, valves, valve seats, valve guides, or burned starter motor windings, caused by the use of alternate fuels such as liquified petroleum, natural gas, altered gasolines, etc.

Warranty is available only through service dealers which have been authorized by Briggs & Stratton Corporation.

You may locate your nearest Authorized Briggs & Stratton Service Dealer in our dealer locator map at www.briggsandstratton.com. Your nearest Authorized Service Dealer is also listed in the "Yellow Pages"™ of your telephone directory under "Engines, Gasoline" or "Gasoline Engines," "Lawn Mowers," or similar category.

| Briggs & Stratton Engines Are Made Under One Or More Of The Following Patents: Design D-247,177 (Other Patents Pending) | | | | | | | | | | |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|--------------|
| 6,135,426 | 5,894,715 | 5,645,025 | 5,546,901 | 5,269,713 | 5,191,864 | 5,070,829 | 4,995,357 | 4,719,682 | 4,520,288 | DES. 308,871 |
| 6,116,212 | 5,823,153 | 5,642,701 | 5,503,125 | 5,265,700 | 5,188,069 | 5,058,544 | 4,977,879 | 4,694,792 | 4,453,507 | DES. 308,872 |
| 6,077,063 | 5,819,513 | 5,619,845 | 5,501,203 | 5,243,878 | 5,186,142 | 5,040,503 | 4,971,219 | 4,684,917 | 4,430,984 | DES. 356,951 |
| 6,064,027 | 5,813,384 | 5,606,948 | 5,497,679 | 5,235,943 | 5,138,996 | 5,040,644 | 4,895,119 | 4,633,556 | DES. 309,458 | DES. 361,771 |
| 6,040,767 | 5,809,958 | 5,606,851 | 5,320,795 | 5,197,425 | 5,105,331 | 5,009,208 | 4,875,448 | 4,630,498 | DES. 309,457 | DES. 375,963 |
| 6,014,808 | 5,765,713 | 5,548,955 | 5,271,363 | 5,197,422 | 5,086,890 | 4,996,956 | 4,819,593 | 4,522,080 | | |

In the USA and Canada, a 24 hour hot line, **1-800-233-3723**, has a menu of pre-recorded messages offering you engine maintenance information.

BRIGGS & STRATTON ENGINE OWNER WARRANTY POLICY
effective July 1, 2001

**Replaces all undated Warranties and all Warranties
dated before July 1, 2001**

LIMITED WARRANTY

Briggs & Stratton Corporation will repair or replace, free of charge, any part, or parts of the engine that are defective in material or workmanship or both. Transportation charges on parts submitted for repair or replacement under this Warranty must be borne by purchaser. This warranty is effective for the time periods and subject to the conditions stated herein. For warranty service, find the nearest Authorized Service Dealer in our dealer locator map at www.briggsandstratton.com or as listed in the 'Yellow Pages™' under 'Engines, Gasoline,' 'Gasoline Engines,' 'Lawn Mowers' or similar category.

THERE IS NO OTHER EXPRESS WARRANTY. IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO ONE YEAR FROM PURCHASE, OR TO THE EXTENT PERMITTED BY LAW ANY AND ALL IMPLIED WARRANTIES ARE EXCLUDED. LIABILITY FOR CONSEQUENTIAL DAMAGES UNDER ANY AND ALL WARRANTIES ARE EXCLUDED TO THE EXTENT EXCLUSION IS PERMITTED BY LAW. Some countries or states do not allow limitations on how long an implied warranty lasts, and some countries or states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation and exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from country to country and state to state.

WARRANTY PERIOD*

| PRODUCTS | WITHIN U.S.A. AND CANADA | | OUTSIDE U.S.A. AND CANADA | |
|--|--------------------------|----------------|---------------------------|----------------|
| | CONSUMER USE | COMMERCIAL USE | CONSUMER USE | COMMERCIAL USE |
| Vanguard™ engines. | 2 years | | | |
| Diamond Plus®, Industrial Plus™, I/C®, and sleeve bore Intek™ engines. | 2 years | 1 year | 2 years | 1 year |
| Quantum® and Diamond Power® and Kool Bore Intek™ engines. | 2 years | 90 days | 2 years | 90 days |
| Standard engines installed on lawn mowers, riders, edgers, chippers, shredders, string trimmers, tillers and Sno/Gard engines. | 2 years | 90 days | 1 year | 90 days |
| Classic™ engines and all other standard engines and products. | 1 year | 90 days | 1 year | 90 days |

* **NOTE THE FOLLOWING SPECIAL WARRANTY PERIODS:** 5 years for consumer use, 90 days for commercial use of Touch-N-Mow™ starter on Quantum® and Intek™ engines; 2 years for emission control systems on engines certified by EPA and CARB; 1 year for consumer use of all engines and products in India, commercial use of Vanguard™ engines in India, and consumer use of Quantum Diamond Power® and Kool Bore Intek™ engines in Australia, New Zealand, the Middle East, and Africa.

The warranty period begins on the date of purchase by the first retail consumer or commercial end user, and continues for the period of time stated in the table above. "Consumer use" means personal residential household use by a retail consumer. "Commercial use" means all other uses, including use for commercial, income producing or rental purposes. Once an engine has experienced commercial use, it shall thereafter be considered as a commercial use engine for purposes of this warranty. ***Engines used in competitive racing or on commercial or rental tracks are not warrantied.***

NO WARRANTY REGISTRATION IS NECESSARY TO OBTAIN WARRANTY ON BRIGGS & STRATTON PRODUCTS. SAVE YOUR PROOF OF PURCHASE RECEIPT. IF YOU DO NOT PROVIDE PROOF OF THE INITIAL PURCHASE DATE AT THE TIME WARRANTY SERVICE IS REQUESTED, THE MANUFACTURING DATE OF THE PRODUCT WILL BE USED TO DETERMINE THE WARRANTY PERIOD.

In the USA and Canada, a 24 hour hot line, **1-800-233-3723**, has a menu of pre-recorded messages offering you engine maintenance information.

**La Corporation Briggs & Stratton (B&S), le California Air Resources Board (CARB)
et le Bureau de protection environnementale des États-Unis (US EPA)**

Garantie sur le système d'échappement (Garantie contre les défauts/défectuosités, droits et obligations du propriétaire)

LA GARANTIE SUR LE SYSTÈME D'ÉCHAPPEMENT EST APPLICABLE SUR LES MOTEURS CERTIFIÉS ACHETÉS EN CALIFORNIE EN 1995 ET LES ANNÉES SUIVANTES ET QUI SONT UTILISÉS EN CALIFORNIE, AINSI QU'AUX MODÈLES CERTIFIÉS DE 1997 ET LES ANNÉES SUI-

VANTES QUI ONT ÉTÉ ACHETÉS ET UTILISÉS AILLEURS AUX ÉTATS-UNIS (ET APRÈS LE 1^{ER} JANVIER 2001 AU CANADA).

Déclaration de garantie sur le système d'échappement pour la Californie, les États-Unis

Le California Air Resources Board (CARB), le Bureau américain de protection environnementale (U.S. EPA) et B&S sont heureux d'expliquer la garantie sur le système d'échappement des petits moteurs hors-route de votre modèle 2000 et des années ultérieures (SORE). En Californie, les nouveaux petits moteurs hors route doivent être conçus, construits et équipés pour rencontrer les standards rigoureux d'antipollution. Ailleurs aux États-Unis, les nouveaux moteurs hors route à bougie d'allumage certifiés pour les modèles de 1997 et plus, doivent rencontrer des normes similaires mises de l'avant par le U.S. EPA. Briggs & Stratton garantit le système de contrôle d'échap-

pement de votre moteur pour la période de temps mentionnée ci-contre, sauf s'il a fait l'objet d'abus, de négligence ou d'un entretien inapproprié.

Votre système de contrôle d'échappement comprend des pièces telles que le carburateur, le filtre à air, le système d'ignition, le silencieux et le convertisseur catalytique. Il peut aussi comprendre les connecteurs et autres pièces reliées à l'émission.

Lorsqu'il y a condition à garantie, B&S réparera gratuitement votre petit moteur hors-route incluant le diagnostic, les pièces et la main d'œuvre.

Couverture de garantie Briggs & Stratton contre toute défectuosité du système de contrôle d'échappement

Les petits moteurs hors route sont garantis contre la défectuosité des pièces du système de contrôle d'échappement pour une période de 2 ans, sujette aux conditions stipulées ci-contre. Si n'impor-

te quelle pièce de votre moteur couverte par cette garantie est défectueuse, elle sera réparée ou remplacée par B&S.

Responsabilités du propriétaire

En tant que propriétaire d'un petit moteur hors route, vous êtes responsable de veiller à l'exécution de l'entretien requis tel que stipulé dans votre manuel d'opération et d'entretien. B&S vous recommande de conserver tous les reçus couvrant les travaux d'entretien de votre petit moteur hors route, mais B&S ne peut refuser la garantie en raison d'absence de reçus ou pour défaut d'avoir suivi tout l'échéancier du programme d'entretien.

En tant que propriétaire d'un petit moteur hors route, vous devez être informé que B&S peut refuser d'honorer cette garantie si la défectuosité de votre moteur ou d'une partie de votre moteur est due à un emploi abusif, une négligence, un entretien incorrect ou une modification non approuvée.

Dispositions de la garantie du système d'échappement Briggs & Stratton

Ce qui suit concerne les dispositions spécifiques relatives à votre garantie sur le système de contrôle d'échappement. C'est une addition à la garantie B&S pour les moteurs non réglementés contenue dans le manuel d'entretien et d'utilisation.

1. Pièces sous garantie

La couverture de cette garantie ne s'applique que sur les pièces listées ci-contre (les parties du système de contrôle d'échappement) dans la mesure où ces pièces étaient présentes sur le moteur au moment de l'achat.

- Système de dosage du carburant
 - Système d'enrichissement de démarrage à froid
 - Carburateur et parties internes
 - Pompe à essence
- Système d'induction d'air
 - Filtre à air
 - Tubulure d'admission
- Système d'ignition
 - Bougies d'allumage
 - Système d'allumage électromagnétique
- Système catalyseur
 - Convertisseur catalytique
 - Collecteur d'échappement
 - Système d'injection d'air ou à pulsion
- Autres pièces utilisées dans les systèmes ci-haut mentionnés
 - Soupapes et interrupteurs de dépression, de température, de position.
 - Connecteurs et assemblages.

2. Durée de la couverture

B&S garantit le propriétaire initial et tous les acheteurs subséquents que les pièces sous garantie sont exemptes de vice de matière ou de fabrication qui pourraient causer des défauts/défectuosités des pièces sous garantie pour une période de deux ans à partir de la date à laquelle le moteur a été livré à l'acheteur.

3. Aucuns Frais

La réparation ou le remplacement de toute pièce sous garantie sera effectuée sans aucuns frais pour le propriétaire, incluant les frais de main d'œuvre pour le diagnostic afin de déterminer si la pièce sous garantie est défectueuse, conditionnel à ce que le diagnostic soit effectué chez un détaillant autorisé B&S. Pour la garantie relative au système d'échappement, communiquer avec un représentant de service B&S au numéro 1-414-259-5262. La garantie du système d'échappement est une garantie contre les défauts/défectuosités. Les défauts/défectuosités sont jugées en fonction d'une utilisation normale du moteur. La garantie n'est pas reliée à un test d'échappement effectué à l'intérieur.

4. Réclamations et exclusions de la couverture.

Les réclamations de garantie doivent être complétées en accord avec les dispositions de la politique de garantie B&S. La garantie ne couvre pas les défauts/défectuosités de pièces qui ne sont pas des pièces d'origine B&S ou dans le cas d'abus, négligence ou d'un entretien inapproprié. La garantie B&S ne couvre pas les défauts/défectuosités de pièces sous garantie qui ont fait l'objet d'ajouts, ont été modifiées ou de pièces qui ne sont pas des pièces B&S d'origine.

5. Entretien

Toute pièce sous garantie qui n'est pas remplacée au moment requis selon le manuel d'entretien ou qui est planifiée seulement pour une inspection régulière sous la mention « réparer ou remplacer si nécessaire » est garantie contre toute défectuosité pour la période de garantie. Toute pièce sous garantie qui est planifiée pour un remplacement tel que requis dans l'entretien est garantie contre toute défectuosité seulement pour la période de temps qui va jusqu'au premier remplacement prévu pour cette pièce. Toute pièce de remplacement équivalente en performance et durabilité peut être utilisée pour l'entretien ou la réparation. Le propriétaire est responsable de l'exécution de tout entretien requis tel que défini dans le manuel d'instruction B&S sur l'entretien et la réparation.

6. Couverture indirecte

La couverture ci-contre s'étend à toute défectuosité des composantes du moteur causée par la défectuosité de n'importe quelle pièce couverte par la garantie et dont la garantie est encore en vigueur.

Consultez les informations sur la période de durabilité d'émission et l'INDICE d'air sur l'étiquette d'émission de votre moteur

Les moteurs qui sont certifiés conformes aux normes standards d'émission du California Air Resources Board (CARB) Tier 2, doivent afficher l'information concernant la période de durabilité du système d'émission et l'INDICE d'air. Cette information est indiquée sur les étiquettes apposées sur les moteurs par Briggs & Stratton. L'étiquette du moteur indiquera les renseignements concernant la certification.

La **période de durabilité d'émission** indique le nombre d'heures d'utilisation normale pour lequel le moteur est certifié conforme aux normes d'émission sous réserve d'un entretien approprié tel qu'indiqué dans le manuel d'opération et d'entretien. Les catégories suivantes sont utilisées :

Modéré le moteur est certifié conforme pour 125 heures d'utilisation normale.

Intermédiaire le moteur est certifié conforme pour 250 heures d'utilisation normale.

Prolongé le moteur est certifié conforme pour 500 heures d'utilisation normale.

Par exemple, une tondeuse de modèle standard est utilisée environ 20 à 25 heures par année. Par conséquent, la **période de durabilité d'émission** d'un moteur dans la catégorie intermédiaire pour ce type de tondeuse équivaut à 10 à 12 ans.

L'**indice d'air** est un nombre qui décrit le niveau relatif d'émission pour une catégorie spécifique de moteur. Plus l'**indice d'air** est bas, plus le moteur est écologique. Cette information est indiquée sous une forme graphique sur l'étiquette d'émission.

A compter du 1^{er} juillet 2000, surveillez la période de conformité d'émission sur les étiquettes

Après le 1^{er} juillet 2000, certains moteurs B&S seront certifiés conformes aux normes environnementales d'émission standard du United States Environmental Protection Agency (US EPA) Phase 2. Pour les moteurs certifiés pour la Phase 2, la période de conformité d'émission mentionnée sur les étiquettes indique le nombre d'heures d'utilisation pour lequel le moteur rencontre les normes fédérales. Pour les moteurs de force moindre que 225 cc, la catégorie C = 125 heures, B = 250 heures et A = 500 heures. Pour les moteurs de 225 cc et plus, la catégorie C = 250 heures, B = 500 heures et A = 1000 heures.

Le remplacement du moteur portant le modèle de série Intek™ 110000 est 167 cc. Le remplacement du moteur portant le modèle de série Intek™ 120000 est 190 cc. Le remplacement du moteur portant le modèle de série Quantum® 120000 est 190 cc.

Ceci est une représentation des étiquettes d'émission

que vous retrouverez sur les moteurs certifiés :

